

Vestra Subwoofer Series



Performance bass, unmatched value.

Unleash the power of premium bass performance with Vestra Subwoofers—designed for those who demand high-quality sound at an affordable price. Equipped with high-linear excursion C-CAM drive units and up to powerful 500-watt amplifiers, the Vestra Subwoofers deliver deep, immersive bass with precision and clarity.



Vestra W15 in Black


Vestra Subwoofer Series

Perfectly suited for music and home cinema setups, their compact design ensures easy placement without compromising on power. Experience tight, impactful lows that bring your audio to life-without breaking the bank.

Vestra Subwoofers: Performance-driven bass for every listener.

Features at a glance:

- New C-CAM come
- High-linear excursion triple suspension driver
- 3 models with 10, 12 & 15" driver sizes
- Combination of sealed and ported designs
- 250 & 500 W Class-D amplification
- 3 preset DSP modes

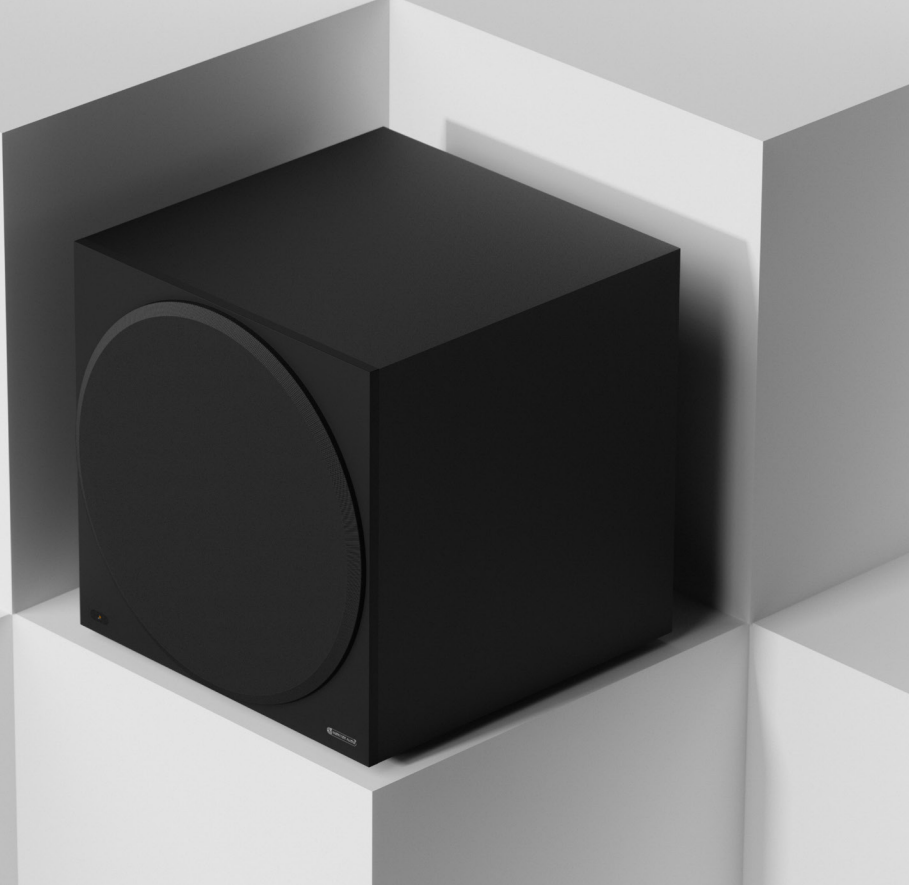

			
Model	Vestra W10	Vestra W12	Vestra W15
System Format	Active	Active	Active
Frequency Response, In-Room (-6dB)	19 - 200 Hz	17 - 200 Hz	17 - 200 Hz
Maximum Usable SPL - Peak (CTA 2010-B, Z-weighted, half-space)	111 dB	115 dB	117 dB
Amplifier Output Instantaneous (RMS)	250 W	500 W	500 W
Amplifier Classification	High-Efficiency Class-D	High-Efficiency Class-D	High-Efficiency Class-D
Low Pass Filter Frequency (-6dB)	32 - 200 Hz	32 - 200 Hz	32 - 200 Hz
Bass Alignment	Sealed	Sealed	Ported
Inputs	Stereo Unbalanced RCA LFE Unbalanced RCA 12 V Trigger 3.5 mm mono jack	Stereo Unbalanced RCA LFE Unbalanced RCA 12 V Trigger 3.5 mm mono jack	Stereo Unbalanced RCA LFE Unbalanced RCA 12 V Trigger 3.5 mm mono jack
Input Impedance	47 kohms	47 kohms	47 kohms
Phase Control	0° & 180° Toggle Switch	0° & 180° Toggle Switch	0° & 180° Toggle Switch
Equalisation DSP	3 pre-set modes: Impact, Movie, Music	3 pre-set modes: Impact, Movie, Music	3 pre-set modes: Impact, Movie, Music
Auto Music Sensing	Auto On: Line Level >3 mV Auto Standby after 20 mins	Auto On: Line Level >3 mV Auto Standby after 20 mins	Auto On: Line Level >3 mV Auto Standby after 20 mins
Mains Input Voltage	Universal Mains, 85 - 265 VAC, 50 - 60 Hz	Universal Mains, 85 - 265 VAC, 50 - 60 Hz	Universal Mains, 85 - 265 VAC, 50 - 60 Hz
Power Consumption (1/8th Maximum Output)	60 W	120 W	120 W
Drive Unit Complement	1x 10" (254 mm) High Linear-Excursion Driver	1x 12" (305 mm) High Linear-Excursion Triple Suspension Driver	1x 15" (381 mm) High Linear-Excursion Triple Suspension Driver
Cabinet Construction	Braced 15 mm MDF with 21 mm front baffle	Braced 15 mm MDF with 21 mm front baffle	Braced 15 mm MDF with 21 mm front baffle
Available Finishes	Black, White	Black, White	Black, White
External Dimensions with all accessories fitted (H x W x D)	344 x 330 x 360mm (13 1/2 x 13 x 14 3/16")	385 x 371 x 401mm (15 1/8 x 14 9/16 x 15 13/16")	540 x 526 x 556mm (21 1/4 x 20 11/16 x 21 7/8")
Packed Dimensions (H x W x D)	470 x 453 x 453mm (18 1/2 x 17 13/16 x 17 13/16")	511 x 504 x 504mm (20 1/8 x 19 13/16 x 19 13/16")	687 x 700 x 700mm (27 1/8 x 27 9/16 x 27 9/16")
Net Weight	13.3 kg (29 lb 5 oz)	18.3 kg (40 lb 6 oz)	30.3 kg (66 lb 13 oz)
Packaged Gross Weight	15.7 kg (34 lb 10 oz)	21.2 kg (46 lb 12 oz)	34.7 kg (76 lb 8 oz)
RRP (GBP, EUR, USD)	£600 / €750 / \$800	£750 / €900 / \$1,000	£900 / €1,150 / \$1,200
EAN	White 220/240V: 5060565775053 Black 220/240V: 5060565775077 White 100/120V: 5060565775060 Black 100/120V: 5060565775084	White 220/240V: 5060565775091 Black 220/240V: 5060565775114 White 100/120V: 5060565775107 Black 100/120V: 5060565775121	White 220/240V: 5060565775138 Black 220/240V: 5060565775152 White 100/120V: 5060565775145 Black 100/120V: 5060565775169

Listen Again.

Information in this document is confidential and subject to change. Pricing is approximate and subject to change.